

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
17 April 2003 (17.04.2003)

PCT

(10) International Publication Number  
**WO 03/031280 A1**

- (51) International Patent Classification<sup>7</sup>: **B65D 75/58**, B65B 61/18
- (21) International Application Number: PCT/NL02/00646
- (22) International Filing Date: 10 October 2002 (10.10.2002)
- (25) Filing Language: Dutch
- (26) Publication Language: English
- (30) Priority Data:  
1019161 11 October 2001 (11.10.2001) NL
- (71) Applicant (for all designated States except US): ITSAC N.V. [NL/NL]; 17, Chuchubiweg, Willemstad, Curaçao (AN).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): LAST, Laurens [NL/MC]; Parc Saint Roman, 7, Avenue de St. Roman, MC-98000 Monte Carlo (MC).
- (74) Agent: BROOKHUIS, H.J.A.; Exter Polak & Charlouis B.V., P.O. Box 3241, NL-2280 GE Rijswijk (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PLASTIC SPOUT



(57) Abstract: A plastic spout (150,170) which is adapted to be sealed between two foil walls of a pouch. The spout has a spout body, which forms a passage (153) for delivering a medium from the pouch and/or feeding a medium to the pouch. In a bottom part thereof, the spout, on opposite sides, forms a sealing zone for a sealed connection to an adjoining foil wall. The sealing zones of the spout body are formed by sealing walls (158,159) which project downward from the spout body, each having a curvature over their entire length, such that each sealing wall is outwardly convex over its entire length with respect to an imaginary plane passing through the outermost ends, which adjoin one another, of the sealing walls. The sealing walls can preferably move flexibly transversely with respect to their plane and, on their inner side, are unsupported or are supported by one or more flexible supporting parts of the spout body.

WO 03/031280 A1

# Plastic spout

The present invention relates to a plastic spout which is intended to be sealed between two foil walls of a pouch, comprising a spout body which forms a passage for delivering a medium from the pouch and/or feeding a medium to the pouch, which spout body, on opposite sides, forms a sealing zone for sealed connection to the adjoining foil wall.

WO 00/66448, in particular Figures 9a-d, in the name of the present applicant has disclosed a plastic spout, which is adapted to be sealed between two foil walls of a pouch. The known spout has a spout body with a central tubular part which forms a passage for delivering a medium from the pouch and/or feeding a medium to the pouch, the medium being, for example, a liquid, powder or gas.

The known spout body, on opposite sides thereof, forms a sealing zone for the adjoining foil wall. These sealing zones are formed by ribs, which project outwards from the central tubular part, lie at an axial distance from one another and adjoin bridge parts, which lie diametrically with respect to the tubular part. The ends of the bridge parts end in thin lips. As seen in the plane running transversely with respect to the tubular part of the spout body, the ribs, together with the adjoining bridge parts and the lips, form a boat-shaped contour on their outer circumference.

During the sealing, the known spout body is introduced between the foil walls of a pouch and a fused join is brought about between the sealing zones of the spout, which are formed by the outermost surfaces of the ribs, the bridge pieces and the lips, on the one hand, and the adjoining parts of the foil walls of the pouch, on the other hand.

The known spout body does not always prove satisfactory, in particular with regard to the sealed connection between the foil walls and the spout body. For example, one drawback is

that producing the sealed connection requires undesirably large amounts of heat and time, with the result that the production rate is undesirably low. In practice, this sealing time is shortened by greatly increasing the pressure with which the foil walls are pressed onto the sealing zones, but this leads to a poor-quality sealed connection.

Another drawback of this known spout is that with certain types of foil, for example foil with a layer of aluminium, the ribs in the sealing zones may cause damage to the foil.

JP2001-240083 has disclosed a spout in accordance with the preamble of claim 1, the spout being provided on the underside with downward projecting thin sealing walls, which between them delimit a substantially oval space. When this known spout is being sealed between the foil walls of a pouch, the spout is first of all placed onto a support member which fits into the oval space. During the sealing, heated sealing jaws are placed onto the outer side of the foil walls, so that the sealing walls and adjoining foil walls, which are clamped between the support member and the sealing jaws, fuse and a welded joint is formed. The support member holds the sealing walls in the intended shape in this arrangement. The sealing walls are designed to be thin, making it possible to produce the sealed connection more quickly.

One drawback of the spout described in JP2001-240083 is that the support member requires the pouch to be open on the underside, so that the support member can project outwards. Furthermore, positioning the spout on the support member and removing the pouch from the support member after sealing has taken place takes up time, which once again slows the production process.

It is an object of the present invention, according to a first aspect thereof, to provide a spout which can be sealed in place without using the support member.

For this purpose the first aspect of the invention provides a spout according to the preamble of claim 1 which is characterised in that the sealing walls each have a curvature over their entire length, such that each sealing wall is  
5 outwardly convex over its entire length with respect to an imaginary plane passing through the outermost ends, which adjoin one another, of the sealing walls.

This design of the sealing walls means that the sealing walls  
10 are stable if, during the sealing operation, external pressure is applied to the sealing walls by means of pressure-exerting means, such as heated sealing jaws. Even with a low thickness of the sealing walls (less than 2 millimetres), this stability is such that there is no need to use a support member during  
15 the sealing operation, with the result that the support member is preferably omitted.

When the spout is being sealed in place, only a small amount of heat is required to melt the sealing walls on the side of  
20 the foil walls which have been pressed onto them. This is because the heat which is supplied during sealing cannot be dissipated to parts of the spout which lie further away from the surface which is to be melted.

25 The heat required to form a seal can be provided using all known sealing methods, for example using heated sealing jaws and/or with the aid of ultrasound.

Further advantages of the spout with sealing walls according  
30 to the first aspect of the invention relate to the production of the spout in a suitable injection mould. This mould can be of relatively simple design, and furthermore the sealing walls require little plastic material. It is also possible for the cooling time for the sealing walls in the mould to be short,  
35 which is advantageous with regard to the production rate and cost price. Moreover, on account of the sealing walls, the mould can be provided with simple and efficient cooling means. In particular, the mould part which defines the inner side of

the sealing walls and is composed of one or more components can be designed with a relatively large volume of material, so that there is space for efficient cooling means therein.

- 5 It is preferable for the sealing walls to be designed to be thin. The wall thickness of the sealing walls is in practice preferably at most 2 millimetres. The invention provides the possibility for the sealing walls to be designed with a thickness which as a minimum corresponds to the thickness of  
10 the foil walls.

- It is preferable for the spout to be designed in such a manner that the sealing walls can move flexibly transversely with respect to their plane and on their inner side to be  
15 unsupported or supported by one or more flexible supporting parts of the spout body. Then, after the spout has been fitted in the pouch, these sealing walls have a shock-absorbing capacity and can yield elastically with foil walls of the pouch. This reduces the risk of damage to and possible leaks  
20 from the pouch at the location of the transition from the foil wall to a sealing wall. Furthermore, the flexibility of the sealing walls is advantageous for the production of the sealed connection, for example because broader dimensional tolerances of the spout body are acceptable without having an adverse  
25 effect on correct operation of the sealing device.

- In a preferred embodiment, it is provided that the outer sides of the sealing walls, against which the foil walls come to bear, are of smooth design, i.e. without ribs or the like.  
30 This design is advantageous, for example, if the foil wall includes one or more layers of metal foil, in particular aluminium foil.

- It is preferable for the spout body to comprise a transverse  
35 wall which extends transversely between the sealing walls, the passage extending through the transverse wall. The transverse wall is preferably situated at or close to the upper edge of the sealing walls. For example, an outwardly projecting

tubular part of the spout body, which forms the passage,  
adjoins the transverse wall.

5 The first aspect of the invention also relates to the sealing  
of a plastic spout between foil walls, in particular of a  
pouch. In this aspect, use is made of pressure-exerting means  
which press the foil walls onto the sealing walls of the pouch  
without a support member internally supporting the sealing  
walls. In an advantageous embodiment, during the sealing of  
10 the spout use is made of pressure-exerting means which yield  
elastically to press the foil walls onto the sealing walls of  
the spout. By way of example, use is made of pressure-exerting  
jaws with an elastic layer, for example made from heat-  
resistant foam material.

15 In an advantageous embodiment, the spout or just the sealing  
walls is/are preheated before the spout is sealed into the  
pouch.

20 A second aspect of the invention relates to a spout according  
to claim 11, in which the sealing walls are connected via  
flexible connecting bodies to a tubular part which fits  
between the sealing walls.

25 A third aspect of the invention provides a spout according to  
claim 13 which is characterised in that the transverse wall is  
provided with one or more corrugations transversely with  
respect to the plane of the transverse wall, which impart  
flexibility to the transverse wall, in such a manner that the  
30 transverse wall allows the flexible movement of the sealing  
walls. The result of this measure is that the transverse wall  
does not cancel out the intended flexibility of the sealing  
walls, so that the shock-absorbing capacity and the sealing  
properties are positively influenced compared to a transverse  
35 wall which is of rigid design.

The present invention also relates to a pouch provided with a  
spout according to the invention.

Further advantageous embodiments of the spout according to the various aspects of the invention are described in the claims and the following description with reference to the drawing,  
5 in which, on a significantly enlarged scale compared to reality:

Fig. 1a shows a side view of a first exemplary embodiment of the plastic spout according to the first aspect of the  
10 invention,

Fig. 1b shows a front view of the spout shown in Figure 1a,  
Fig. 1c shows a view from below of the spout shown in Figure 1a,

Fig. 1d shows a perspective view of the spout shown in Figure  
15 1a from above,

Fig. 1e shows a perspective view of the spout shown in Figure 1a from below,

Fig. 2 a shows a side view of a second exemplary embodiment of the plastic spout according to the first aspect of the  
20 invention,

Fig. 2b shows a front view of the spout shown in Figure 2a,  
Fig. 2c shows a view from below of the spout shown in Figure 2a,

Fig. 2d shows a perspective view of the spout shown in Figure  
25 2a from above,

Fig. 2e shows a perspective view of the spout shown in Figure 2a from below,

Fig. 3a shows a side view of an exemplary embodiment of the plastic spout according to the second aspect of the invention,  
Fig. 3b shows a front view of the spout shown in Figure 3a,  
Fig. 3c shows a view from below of the spout shown in Figure 3a,

Fig. 3d shows a perspective view of the spout shown in Figure  
35 3a from above,

Fig. 3e shows a perspective view of the spout shown in Figure 3a from below,

Fig. 4a shows a side view of an exemplary embodiment of the plastic spout according to the third aspect of the invention, Fig. 4b shows a front view of the spout shown in Figure 4a, 5 Fig. 4c shows a view from below of the spout shown in Figure 4a, Fig. 4d shows a perspective view of the spout shown in Figure 4a from above, Fig. 4e shows a perspective view of the spout shown in Figure 10 4a from below.

Figures 1a-e show a spout 150 which is produced by injection-moulding from a suitable plastic material and which is intended to be sealed between two foil walls of a pouch.

15 The spout 150 has a single-part spout body with, on the top side, an outwardly projecting tubular part 152 which forms a passage 153 for delivering a medium from the pouch and/or feeding a medium to the pouch.

20 The tubular part 152 is provided with a screw thread 154 for a screw cap (not shown), which can be used to close off the spout 150.

25 The outwardly projecting tubular part 152 is furthermore provided with a locking flange 155 for the screw cap and, beneath this, two circumferential flanges 156 which are used for handling means for the spout 150 and the pouch to engage on after the spout 150 has been sealed in the pouch.

30 On the underside, the spout 150 is provided with two sealing walls 158, 159 which project freely downwards, adjoin one another at their diametrically opposite ends and have an oval contour both on the inner side and on the outer side. The 35 sealing walls 158, 159 adjoin the remainder of the spout body 150 only at their upper edge. Therefore, the sealing walls 158, 159 between them delimit an oval space.



In particular, the sealing walls 158, 159 have a curvature over their entire length, in such a manner that each sealing wall 158, 159 is externally convex with respect to the imaginary line passing through the outermost ends, which  
5   adjoin one another, of the sealing walls. This is more stable than the design which is known from the prior art in which the sealing walls have straight wall parts, and certainly more stable than the design according to the prior art in which the sealing walls have parts with an inwardly directed convexity.  
10   The latter variants provide too little resistance to the sealing walls being undesirably folded inwards, for example while the sealed connection is being produced.

The sealing walls 158, 159 are designed to be smooth on the  
15   outer side. The sealed connection to the foil walls can then be produced over virtually the entire surface of the thin sealing walls 158, 159. In this context, the thin design of the sealing walls 158, 159 makes a significant contribution to the short sealing time, since little heat has to be supplied  
20   in order to produce the fused connection.

The sealing walls 158, 159 have no internal support and are flexibly movable and can easily be moved transversely with respect to the plane of the sealing walls 158, 159.  
25

The flexibility of the sealing walls 158, 159 provides the pouch with a shock-absorbing capacity, as can be seen from a test which involves dropping a filled pouch. Furthermore, the flexibility of the sealing walls 158, 159 avoids overloading  
30   the foil walls of the pouch in the vicinity of the bottom edge of the sealing walls 158, 159.

When the sealed connection is being produced, it is preferable to use jaws which completely surround the sealing walls, so  
35   that a sufficient pressure can then be obtained between the foil walls and the sealing walls.

In a variant, to produce the sealed connection sealing jaws

which are provided with ribs or another profile, for example a waffle profile or a block profile, are used instead of sealing jaws with smooth jaw surfaces, so that the initial pressure is exerted at the location of the elevated parts of the profile.

5

In the spout 170 shown in Figure 2a-e, the sealing walls 171, 172 are designed with an even greater curvature than in the embodiment shown in Figure 1.

10 At the location where the sealing walls 171, 172 meet, outwardly projecting thin lips 173, 174 are formed, these lips forming the transition to the parts of the foil walls of the pouch which are sealed together.

15 The inner side of the sealing walls may be of smooth design, as shown in the drawings, but it would also be possible to provide one or more formation, for example a thickened edge or a groove, in order to secure another component in the space between the sealing walls. By way of example, in this way it  
20 is possible for a flexible insert to be clipped into place, reducing the size of the effective area of the passage.

The spout 90 according to the second aspect of the invention will now be explained in more detail with reference to Figures  
25 3a-e.

The spout 90 has a single-part spout body with, at the top side, an outwardly projecting tubular part 92 which forms a passage 93 for delivering a medium from the pouch and/or  
30 feeding a medium to the pouch.

The tubular part 92 is provided with a screw thread 94 for a screw cap (not shown), which is used to close off the spout  
90.

35

The outwardly projecting tubular part 92 is furthermore provided with two circumferential flanges 95, which are used for handling means for the spout 90 and the pouch to engage on

after the spout 90 has been sealed into the pouch.

On the underside, the spout 90 is provided with two sealing walls 98, 99 which project freely downwards and have an eye-shaped contour both on the inner side and on the outer side.  
5 Since the sealing walls 98, 99 have straight parts in the vicinity of their ends, these sealing walls do not comply with the first aspect of the invention.

10 On the underside, the spout body 90 comprises a tubular part 100 which extends in line with the tubular part 92 and the diameter of which is smaller than the corresponding dimensions of the space delimited by the sealing walls 98, 99.

15 The tubular part 100 is connected to the inner side of the sealing walls 98, 99 via two diametrically opposite flexible connecting bodies 101, 102.  
In this case, the connecting bodies 101, 102 are provided with a curvature and are therefore flexible, so that the connecting  
20 bodies 101 allow the flexible movement of the sealing walls 98, 99.

The spout 110 according to the third aspect of the invention will now be explained in more detail with reference to Figures  
25 4a-e.

The spout 110 has a single-part spout body with, at the top side, an outwardly projecting tubular part 112 which forms a passage 113 for delivering a medium from the pouch and/or  
30 feeding a medium to the pouch.

The tubular part 112 is provided with a screw thread 114 for a screw cap (not shown), which is used to close off the spout 110.

35 The outwardly projecting tubular part 112 is furthermore provided with two circumferential flanges 115, which are used for handling means for the spout 110 and the pouch to engage

on after the spout 110 has been sealed into the pouch.

On the underside, the spout 110 is provided with sealing walls 118, 119 which project freely downwards and have an eye-shaped  
5 contour both on the inner side and on the outer side.

On the underside, the spout body 110 comprises a tubular part 120 which extends in line with the tubular part 112 and the diameter of which is smaller than the internal dimensions of  
10 the space delimited by the sealing walls 118, 119.

A transverse wall 122, which is provided with corrugations, extends between the sealing walls 118, 119, so that the transverse wall is flexible and allows the flexible movement  
15 of the sealing walls 118, 119.

The transverse wall 122 also forms a flexible connection between the tubular parts 112, 120, which lie in line with one another, on the one hand, and the sealing walls 118, 119, on  
20 the other hand.

The design of the spout shown in Figure 4 is highly advantageous with regard to the shock-absorbing capacity of the pouch. The pressure which is formed in the medium in the  
25 pouch in a test which involves dropping the pouch, in particular where the medium is a liquid, will now lead to elastic deformation of the transverse wall 122 (and also of the sealing walls), so that there is no pressure surge leading to (a seam of) the pouch giving way.

30

It will be clear that the spout body may have all kinds of designs, for example may be designed in combination with a stopper for closing off the passage, a male element if the spout is used as a connector, etc.

## CLAIMS

1. Plastic spout (150; 170) which is adapted to be sealed between two foil walls of a pouch, comprising a spout body  
5 which forms a passage for delivering a medium from the pouch and/or feeding a medium to the pouch, which spout body, in a bottom part thereof, on opposite sides forms a sealing zone for a sealed connection to an adjoining foil wall, the sealing zones of the spout body being formed by sealing walls which  
10 project downwards from the spout body and between them delimit an oval space, characterised in that the sealing walls (158, 159; 171, 172) each have a curvature over their entire length, such that each sealing wall is outwardly convex over its  
15 entire length with respect to an imaginary plane passing through the outermost ends, which adjoin one another, of the sealing walls.
2. Spout according to claim 1, in which the sealing walls are designed to be thin, preferably with a maximum thickness  
20 of 2 millimetres.
3. Spout according to claim 1 or 2, in which the sealing walls are flexible transversely with respect to their plane and are supported on their inner sides.  
25
4. Spout according to one or more of claims 1-3, in which the outer sides of the sealing walls are of smooth design.
5. Spout according to one or more of the preceding claims,  
30 in which the spout body comprises a transverse wall, which extends transversely with respect to the sealing walls, and in which the passage extends through the transverse wall.
6. Spout according to claim 5, in which the transverse wall  
35 is provided with one or more corrugations transversely with respect to the plane of the transverse wall, which impart flexibility to the transverse wall, in such a manner that the transverse wall allows the flexible movement of the sealing

walls.

7. Spout according to claim 6, in which a V-shaped or U-shaped transverse wall connects the upper edges of the sealing walls to one another.

8. Spout according to one or more of the preceding claims, which has an outwardly projecting tubular part which extends outside the sealing walls and forms at least a part of the passage for the medium.

9. Spout according to claim 8, in which the outwardly projecting tubular part is provided with one or more circumferential flanges, in particular for handling means for the spout to engage on.

10. Spout according to one of more of the preceding claims, in which the spout body is designed for a closure to be fitted to, for example is provided with a screw thread for a cap.

11. Plastic spout (90) which is adapted to be sealed between two foil walls of a pouch, comprising a spout body which forms a passage for delivering a medium from the pouch and/or feeding a medium to the pouch, which spout body comprises a tubular part which delimits at least a part of the passage of the spout, and which spout body, in a bottom part thereof, on opposite sides, forms a sealing zone for a sealed connection to an adjoining foil wall, the sealing zones of the spout body being formed by sealing walls which project downwards from the spout body and between them delimit an oval space, characterised in that the tubular part (100) extends as far as between the sealing walls (98, 99) and, via one or more flexible connecting bodies (101, 102), adjoins the inner side of the sealing walls.

12. Spout according to claim 11, in which each connecting body is provided with one or more corrugations for creating the flexibility.

13. Plastic spout (110) adapted to be sealed between two foil walls of a pouch, comprising a spout body which forms a passage for delivering a medium from the pouch and/or feeding a medium to the pouch, which spout body, in a bottom part thereof, on opposite sides forms a sealing zone for a sealed connection to an adjoining foil wall, the sealing zones of the spout body being formed by sealing walls which project downwards from the spout body, the spout body comprising a transverse wall which extends transversely with respect to the sealing walls, and the passage extending through the transverse wall, characterised in that the transverse wall (122) is provided with one or more corrugations transversely with respect to the plane of the transverse wall, which impart flexibility to the transverse wall, in such a manner that the transverse wall allows the flexible movement of the sealing walls (118, 119).

14. Spout according to claim 13, in which a V-shaped or U-shaped transverse wall connects the upper edges of the sealing walls to one another.

15. Method for sealing a plastic spout according to claim 1 between two foil walls of a pouch, which spout has a spout body which forms a passage for delivering a medium from the pouch and/or feeding a medium to the pouch, which spout body, on opposite sides, forms a sealing zone for sealing to an adjoining foil wall, pressure-exerting means being used during the sealing to press the foil walls onto the sealing walls, characterised in that there is no internal support for the sealing walls while the spout is being sealed in place.

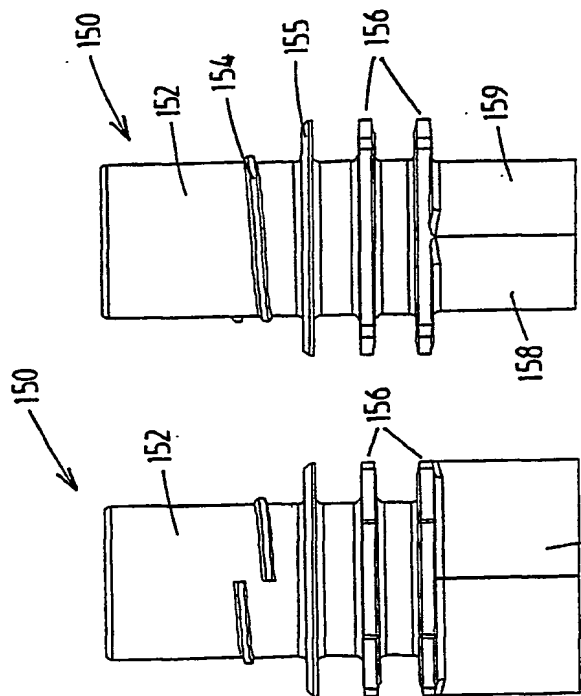


Fig. 1B

Fig. 1A

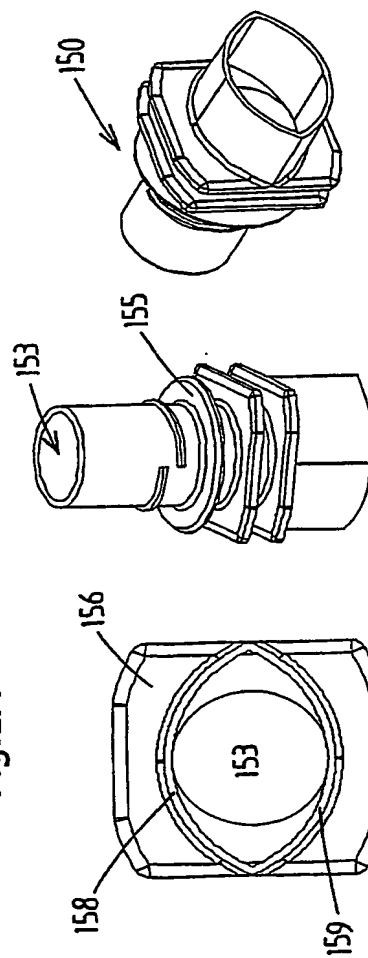


Fig. 1E

Fig. 1D

Fig. 1C



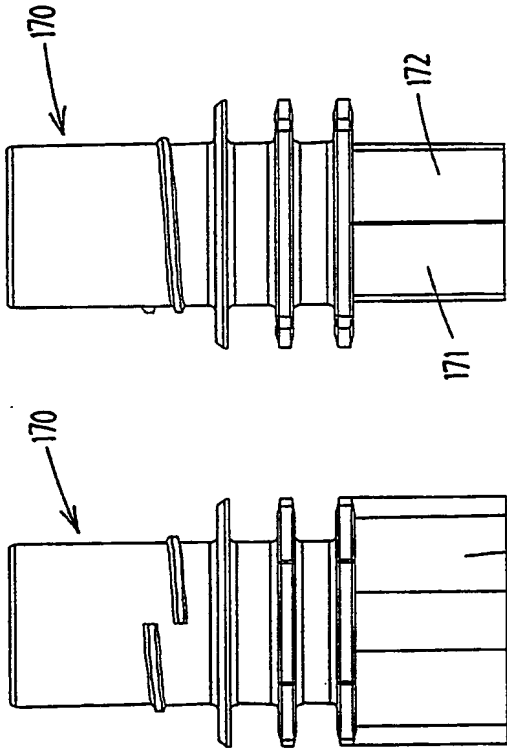


Fig. 2B

Fig. 2A

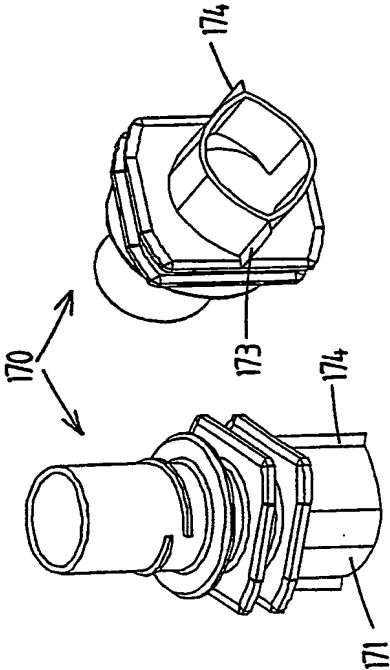


Fig. 2D

Fig. 2E

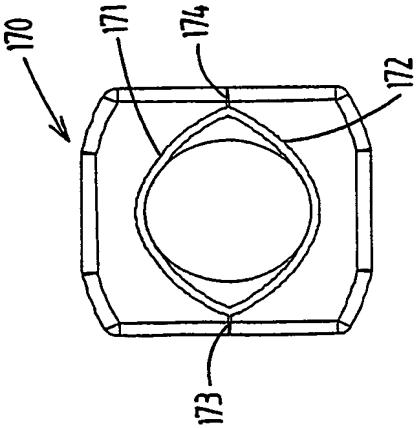


Fig. 2C

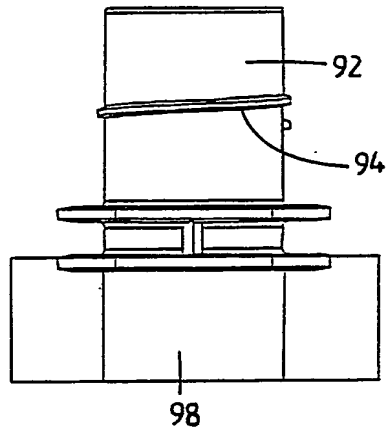



Fig.3A

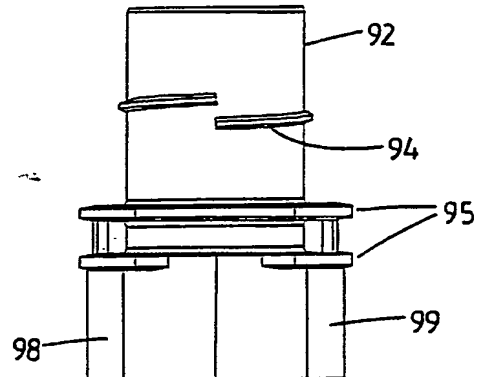


Fig.3B

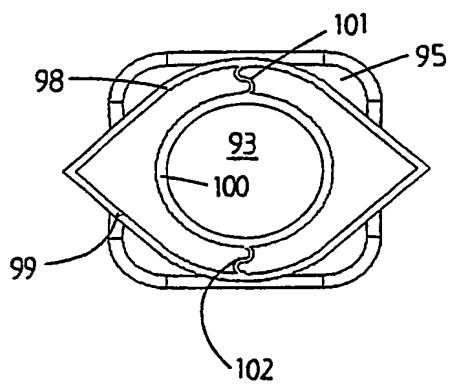


Fig.3C

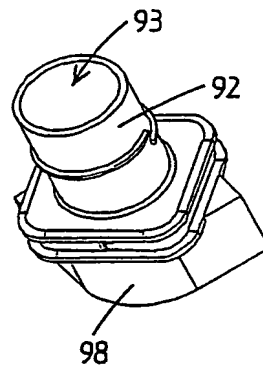


Fig.3D

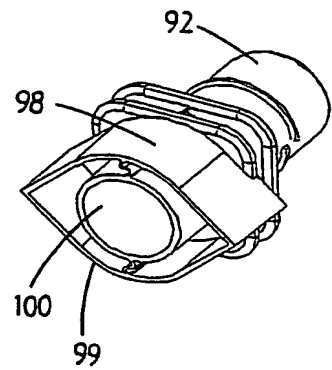


Fig.3E

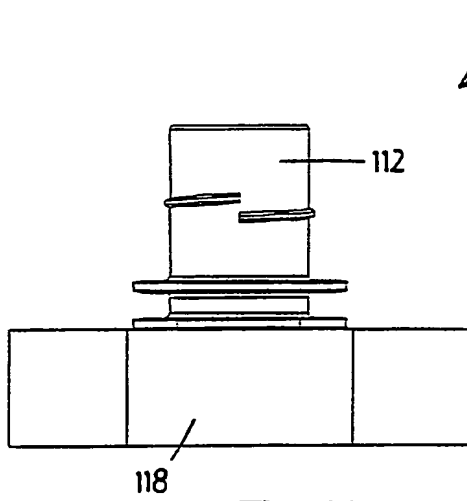


Fig. 4A

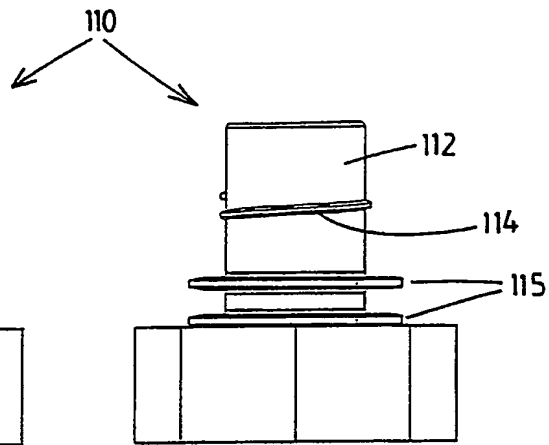


Fig. 4B

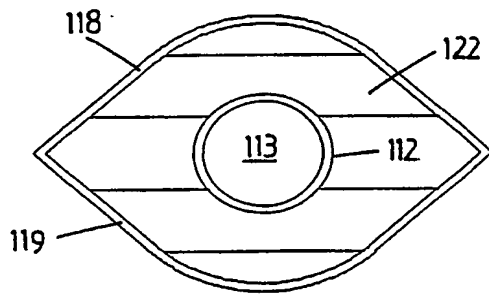


Fig. 4C

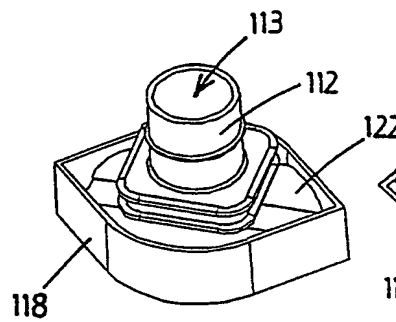


Fig. 4D

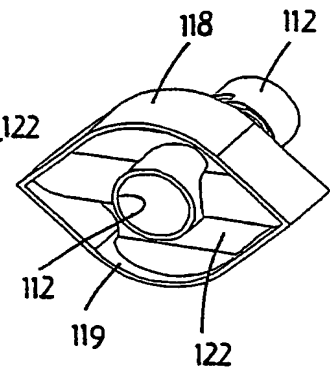


Fig. 4E

## INTERNATIONAL SEARCH REPORT

PCT/NL 02/00646

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B65D75/58 B65B61/18

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65D B65B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 800 994 A (VOLPAK SA) 15 October 1997 (1997-10-15)	1,3,5, 8-10,15
Y	column 4, line 12 -column 5, line 20; figures 1,3,4	2,4
Y	JP 2001 240083 A (FUJI SEAL INC) 4 September 2001 (2001-09-04)	2,4
A	paragraph '0021!; figures	1,3,5, 8-11,13
A	US 6 131 806 A (BROWN STUART R ET AL) 17 October 2000 (2000-10-17)	1,4,5,8, 11,13
A	column 7, line 16 - line 36; figure 9	
A	US 6 273 307 B1 (GROSS RICHARD A ET AL) 14 August 2001 (2001-08-14)	1,5,8, 11,13
	column 4, line 17 -column 5, line 2; figure 8	

☐ Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the International filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

20 December 2002

Date of mailing of the international search report

19/03/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel: (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Bridault, A

# INTERNATIONAL SEARCH REPORT

PCT/NL 02/00646

## Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
  
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
  
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-10, 15

Spout which can be sealed without inner support, and method of sealing

2. Claims: 11-14

Spouts with means for enhancing the flexibility of the sealing walls

## INTERNATIONAL SEARCH REPORT

PCT/NL 02/00646

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0800994	A	15-10-1997	ES 2130929 A1 AT 194803 T DE 69702563 D1 DE 69702563 T2 EP 0800994 A1 ES 2150205 T3 GR 3034612 T3	01-07-1999 15-08-2000 24-08-2000 08-03-2001 15-10-1997 16-11-2000 31-01-2001
JP 2001240083	A	04-09-2001	NONE	
US 6131806	A	17-10-2000	US 6050451 A AU 751904 B2 AU 2026000 A BR 9915485 A CN 1333727 T EP 1159220 A2 JP 2002530253 T PL 348706 A1 WO 0030969 A2	18-04-2000 29-08-2002 13-06-2000 31-07-2001 30-01-2002 05-12-2001 17-09-2002 03-06-2002 02-06-2000
US 6273307	B1	14-08-2001	AU 7727401 A WO 0214169 A1	25-02-2002 21-02-2002